



Meteor series Speed Gate LX306 Brochure

Designed By MairsTurnstile

Enhanced by meteor elements, unique & distinctive




Product Introduction




The meteor series speed gate MT-LX306 has a relatively slender appearance, with a top cover made of tempered glass and a combination of black paint and stainless steel. The production process and overall appearance appear high-end and atmospheric. The baffle can be customized according to the actual situation, such as high baffle, widened baffle for disabled people, ordinary baffle, etc.



Dimensions

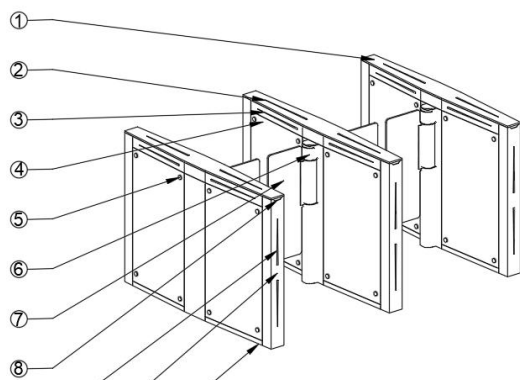

- ① Acrylic CARD Window
- ② Decorative LED
- ③ IR acrylic cover
- ④ Side door
- ⑤ Special lock screw
- ⑥ Mechanism LED
- ⑦ Acrylic swing
- ⑧ Status LED indicator
- ⑨ Meteor Pattern Welcome LED
- ⑩ Arrow pattern Status LED
- ⑪ Position of Fixing Screw

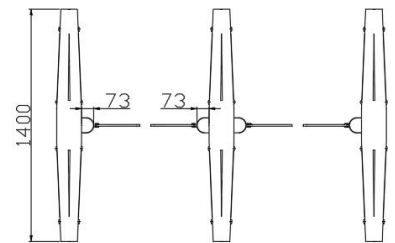

*Lane width 600mm&900mm available.

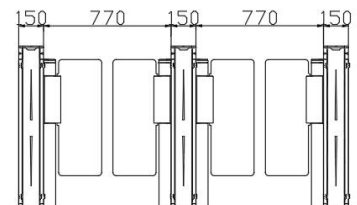

*Gate size and lane width can be customized to site dimensions.

Technical Specifications

Gate Dimension	1400*150*980mm (1.97*0.49*3.21ft) (standard)
Gate Material	Iron with powder coated+SUS304 +tempered glass
Swing arm Material	Acrylic flap with LED (standard), Tempered glass
Max Door height	1800mm (5.9ft)
Passage Width	600mm (1.97ft) -1400mm(4.59ft)
Power Supply	100V-240V, 50/60Hz
Mechanism	Servo motor mechanism
MCBF	10,000,000 Cycles
IR Sensor	6 pairs
Infrared sensor alarm	Illegal intrusion and reverse intrusion
Open Signal	Passive Relay (Dry Contact)
Communication	RS485/RS232
Working Temperature	-40°C ~ 70°C
Delayed access	Barrier will lock automatically within 5s (adjustable) if a person delay to access
Working Environment	Indoor
Anti- collision	The gates instantaneously encounter an impulse force that is beyond the safety range, the arm will automatic reset in place
Anti-pass back	The gate will stay in lock if someone wants to entry in the reverse direction



PASSING SPEED



PASSAGE FOR DISABLE



BI-DIRECTION



POWER SUPPLY



ANTI-TAILGATING




PROTECTIVE LEVEL


Lane Combination



One lane

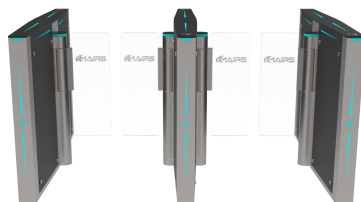


Two lanes

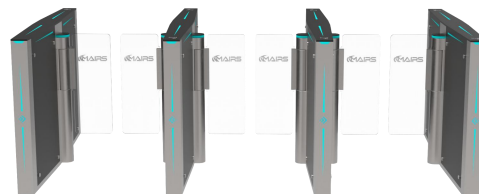


Three lanes


LED Display



The LED is **BLUE** when in standby mode and lane is available.



The LED is **GREEN** when the lane allows access.

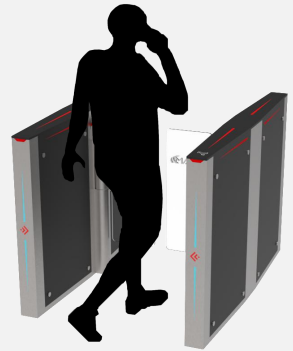

The LED is **RED** when the lane is not available/ access declined.

Emergency Mode



**Powered of equipment
with Super Capacitor Backup**


When power fails or emergency mode, swing arms are unlocked and open automatically.



Customization

The cutout for readers can be customized

Provide us with the dimensions of the card reader/scanner or other access control reader and we will customize the cutout according to its dimensions.





LOGO can be customized

1. Logo can be printed on swing arm, acrylic decorative bar, swipe card window. AI or CRD files required.
2. Logo can be printed on metal nameplates and attached to gates.



Chassis color can be customized

Supports paint coated or galvanized.
RGB, RAL or Pantone number required.



Black



Gray



Green



Gold




Woodgrain

Other customizable Options

- Gate dimensions can be customized according to the site.
- Material optional: 304 stainless steel, 316 stainless steel, iron with powder coated and galvanized (color can be customized).
- Swing arm material available in glass or acrylic.
- Lights and infrared sensors can be added.
- LED colors can be customized.
- Swipe card icon can be cancelled.
- Customized 3D drawings are available based on the site photos.
- OEM&ODM service is available.

Optional Accessories

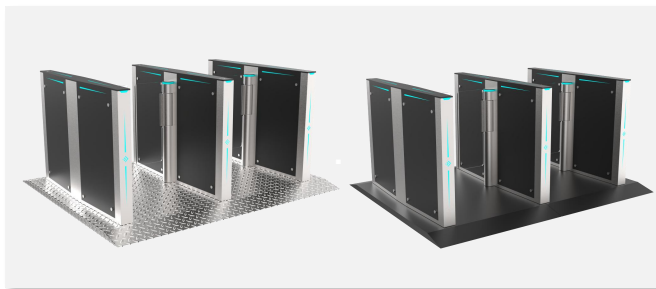

Mounting Base


Optional:

1. Mounting base (for above floor wiring) ;
2. Removable base with wheels (for temporary events);
3. 201 stainless steel with anti-slip texture;
4. Iron with black powder coated.

Barrier

Optional:

1. Acrylic barrier (Logo can be printed);
2. Stainless steel tube barrier;
3. 304/316 stainless steel;
4. Iron with black powder coated.

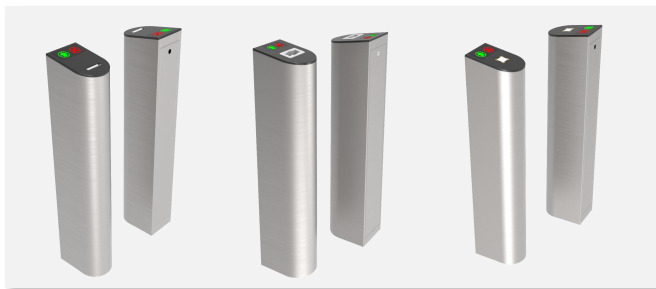

Pillar

Optional:

1. Card collector pillar;
2. Wristband collector pillar;
3. QR code scanner pillar.

Control Panel

Buttons:

- Right/Left open
- Right/Left lock
- Right/Left free passage
- Emergency



Access Control System

Our turnstile gates come with relay signals and RS485/RS232 interfaces. You can use your own access control system, or we can provide a complete access control system to you.





CONTACT US

Address: Room 801-806, Center,Guoji Blvd, Pinghu Street,
Longgang District, Shenzhen, China

Web: www.mairsturnstile.com

Email: info@mairsturnstile.com

Tel: +86 755 28714921