

Speed Gate MT-A304

Brochure

Designed By MairsTurnstile



Provide high-quality security turnstile solutions for global customers



MAIRS

www.mairsturnstile.com

Speed Gate MT366

Speed gate turnstile MT-A304 adopts a round and slender column shape, with a lightweight body that does not occupy channel space. The lines are smooth and soft, suitable for various narrow channel lobbies. The whole machine is made of thickened brushed stainless steel, which is formed in one piece, resistant to fingerprints, rust and wear, and remains bright and new even after high-frequency use all year round.

The top is equipped with a unique three-stage layered LED indicator light, and the surrounding light strip lights up in sections, creating clear and intuitive traffic conditions. The segmented lighting creates a three-dimensional light and shadow hierarchy, and the metal cold tone is matched with soft green light, which directly fills the modern and technological sense. It is different from ordinary circular light strip turnstiles on the market, and its external recognition is far ahead. It is versatile and durable in modern spaces such as office buildings, hotels, banks, and gyms.

Brushless servo motor for fast and silent passage, top-level anti tailgating+dual anti pinch dual safety guarantee; Supporting full dimensional deep customization, the body logo, gate size, channel width, and recognition device installation panel can be adjusted as needed; Seamless integration with various third-party access controls, universal for offices, hotels, banks, and gyms, factory direct supply with high cost-effectiveness, and global bulk shipping!

Technical Specifications


Dimension	1500*150*980mm (4.92*0.49*3.22ft) (standard)	Power Supply	100V-240V 50/60Hz
Brand	MairsTurnstile	IR sensor	6 pairs
Material	Cap1.5 mm+body 1.2mm Brushed SUS 304	Working Environment	Indoor
Arm Material	Acrylic with LED	Open Signal	Passive Relay (Dry Contact)
Passage Width	600mm (1.97ft) - 1200mm(3.94ft)	Communication	RS485/RS232
Passage direction	Unidirectional/Bi-directional	Working Temperature	-40°C ~ 70°C
Mechanism	Servo Motor	Working Direction	Unidirectional/Bi-directional
Pass rate	40 persons/minute	MCBF	10,000,000 Cycles
Operating time	0.2 seconds	Relative Humidity	95% Maximum




Lane Combination



One Lane

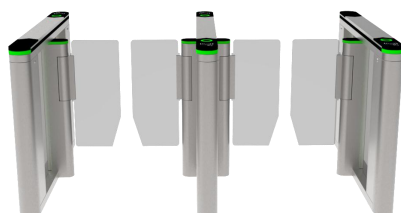

Two Lanes

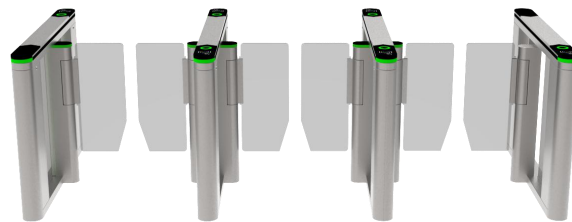


Three Lanes




Features

- **Led Alerts:** High-visibility green and red icons indicate direction in real time.
- **Emergency Exit:** Allows free passage during power outages or emergencies and resets automatically when power returns.
- **Working Direction:** Supports both single-directional and bi-directional operation.
- **Automatic Reset:** Arms lock automatically within 5 seconds (adjustable) if access is delayed.
- **Aanti-pass Back:** The gate stays locked if someone attempts entry from the reverse direction.
- **Anti-Intrusion:** The gate remains locked until a valid open signal is received.
- **Fast Unlock:** Unlocks within 0.2 seconds (adjustable) upon receiving a valid signal.
- **High Performance:** Long-life, highly reliable operation with fast response.
- **High Mechanism:** Full-height mechanism ensures smooth and stable running.
- **Alarm Function:** Infrared sensors trigger an alarm for illegal or reverse intrusion.

Dimensions

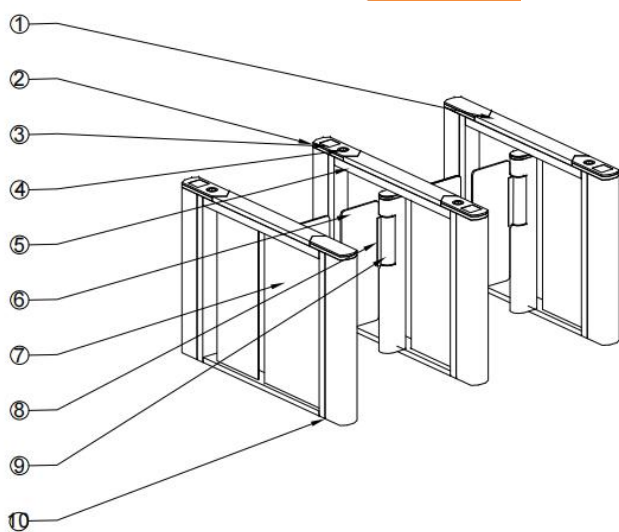

- ① Top Lid
- ② LED Indicator
- ③ Acrylic CARD Window
- ④ Lane Status Indicator
- ⑤ IR Sensor Cover
- ⑥ Acrylic Barrier
- ⑦ Acrylic Side Panel
- ⑧ Chuck
- ⑨ Transmission rod
- ⑩ Position of Fixing Screw

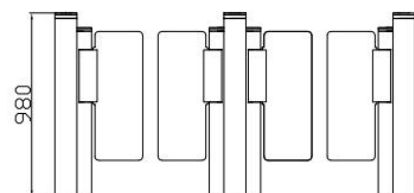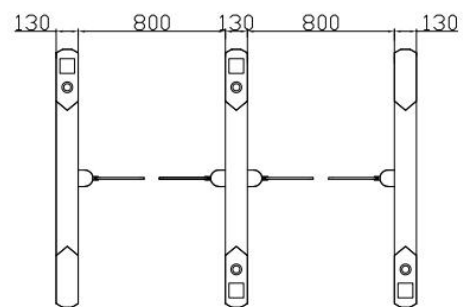

Customization

The cutout for readers can be customized

Provide us with the dimensions of the card reader/scanner or other access control reader and we will customize the cutout according to its dimensions.




LOGO can be customized

1. Logo can be printed on swipe card window, or cutout the logo on the gate body with LED. AI or CRD files required.
2. Logo can be printed on metal nameplates and attached to gates.



Chassis color can be customized

Supports paint coated or galvanized.
RGB, RAL or Pantone number required.

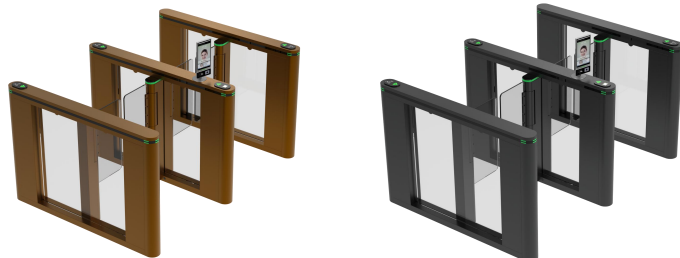

Black



Gray



Green



Gold



Red

Other customizable Options

- Gate dimensions can be customized according to the site.
- Material optional: 304 stainless steel, 316 stainless steel, iron with powder coated and galvanized (color can be customized).
- Tripod arm material available in stainless steel and power coated in galvanized steel
- Lights and infrared sensors can be added.
- LED colors can be customized.
- Swipe card icon can be cancelled.
- Customized 3D drawings are available based on the site photos.
- OEM&ODM service is available.

Accessories



Mounting Base


Optional:

1. Mounting base (for above floor wiring) ;
2. Removable base with wheels (for temporary events);
3. 201 stainless steel with anti-slip texture;
4. Iron with black powder coated.

Barrier

Optional:

1. Acrylic barrier (Logo can be printed);
2. Stainless steel tube barrier;
3. 304/316 stainless steel;
4. Iron with black powder coated.

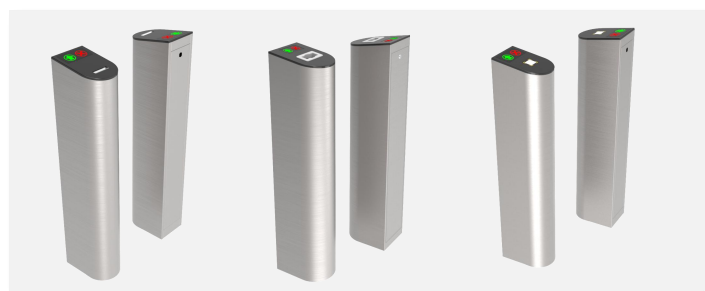

Pillar

Optional:

1. Card collector pillar;
2. Wristband collector pillar;
3. QR code scanner pillar.

Control Panel

Buttons:

- Right/Left open
- Right/Left lock
- Right/Left free passage
- Emergency



Access Control

Our turnstile gates come with relay signals and RS485/RS232 interfaces. You can use your own access control system, or we can provide a complete access control system to you.





Contact Us

Address: Room 801-806, Center,Guoji Blvd, Pinghu Street, Longgang District, Shenzhen, China

Tel: +86 755 28714921

Email: info@mairsturnstile.com

Site: www.mairsturnstile.com