




Full Height Turnstile MT408 Brochure

Designed By MairsTurnstile

www.mairsturnstile.com



Full Height Turnstile MT408

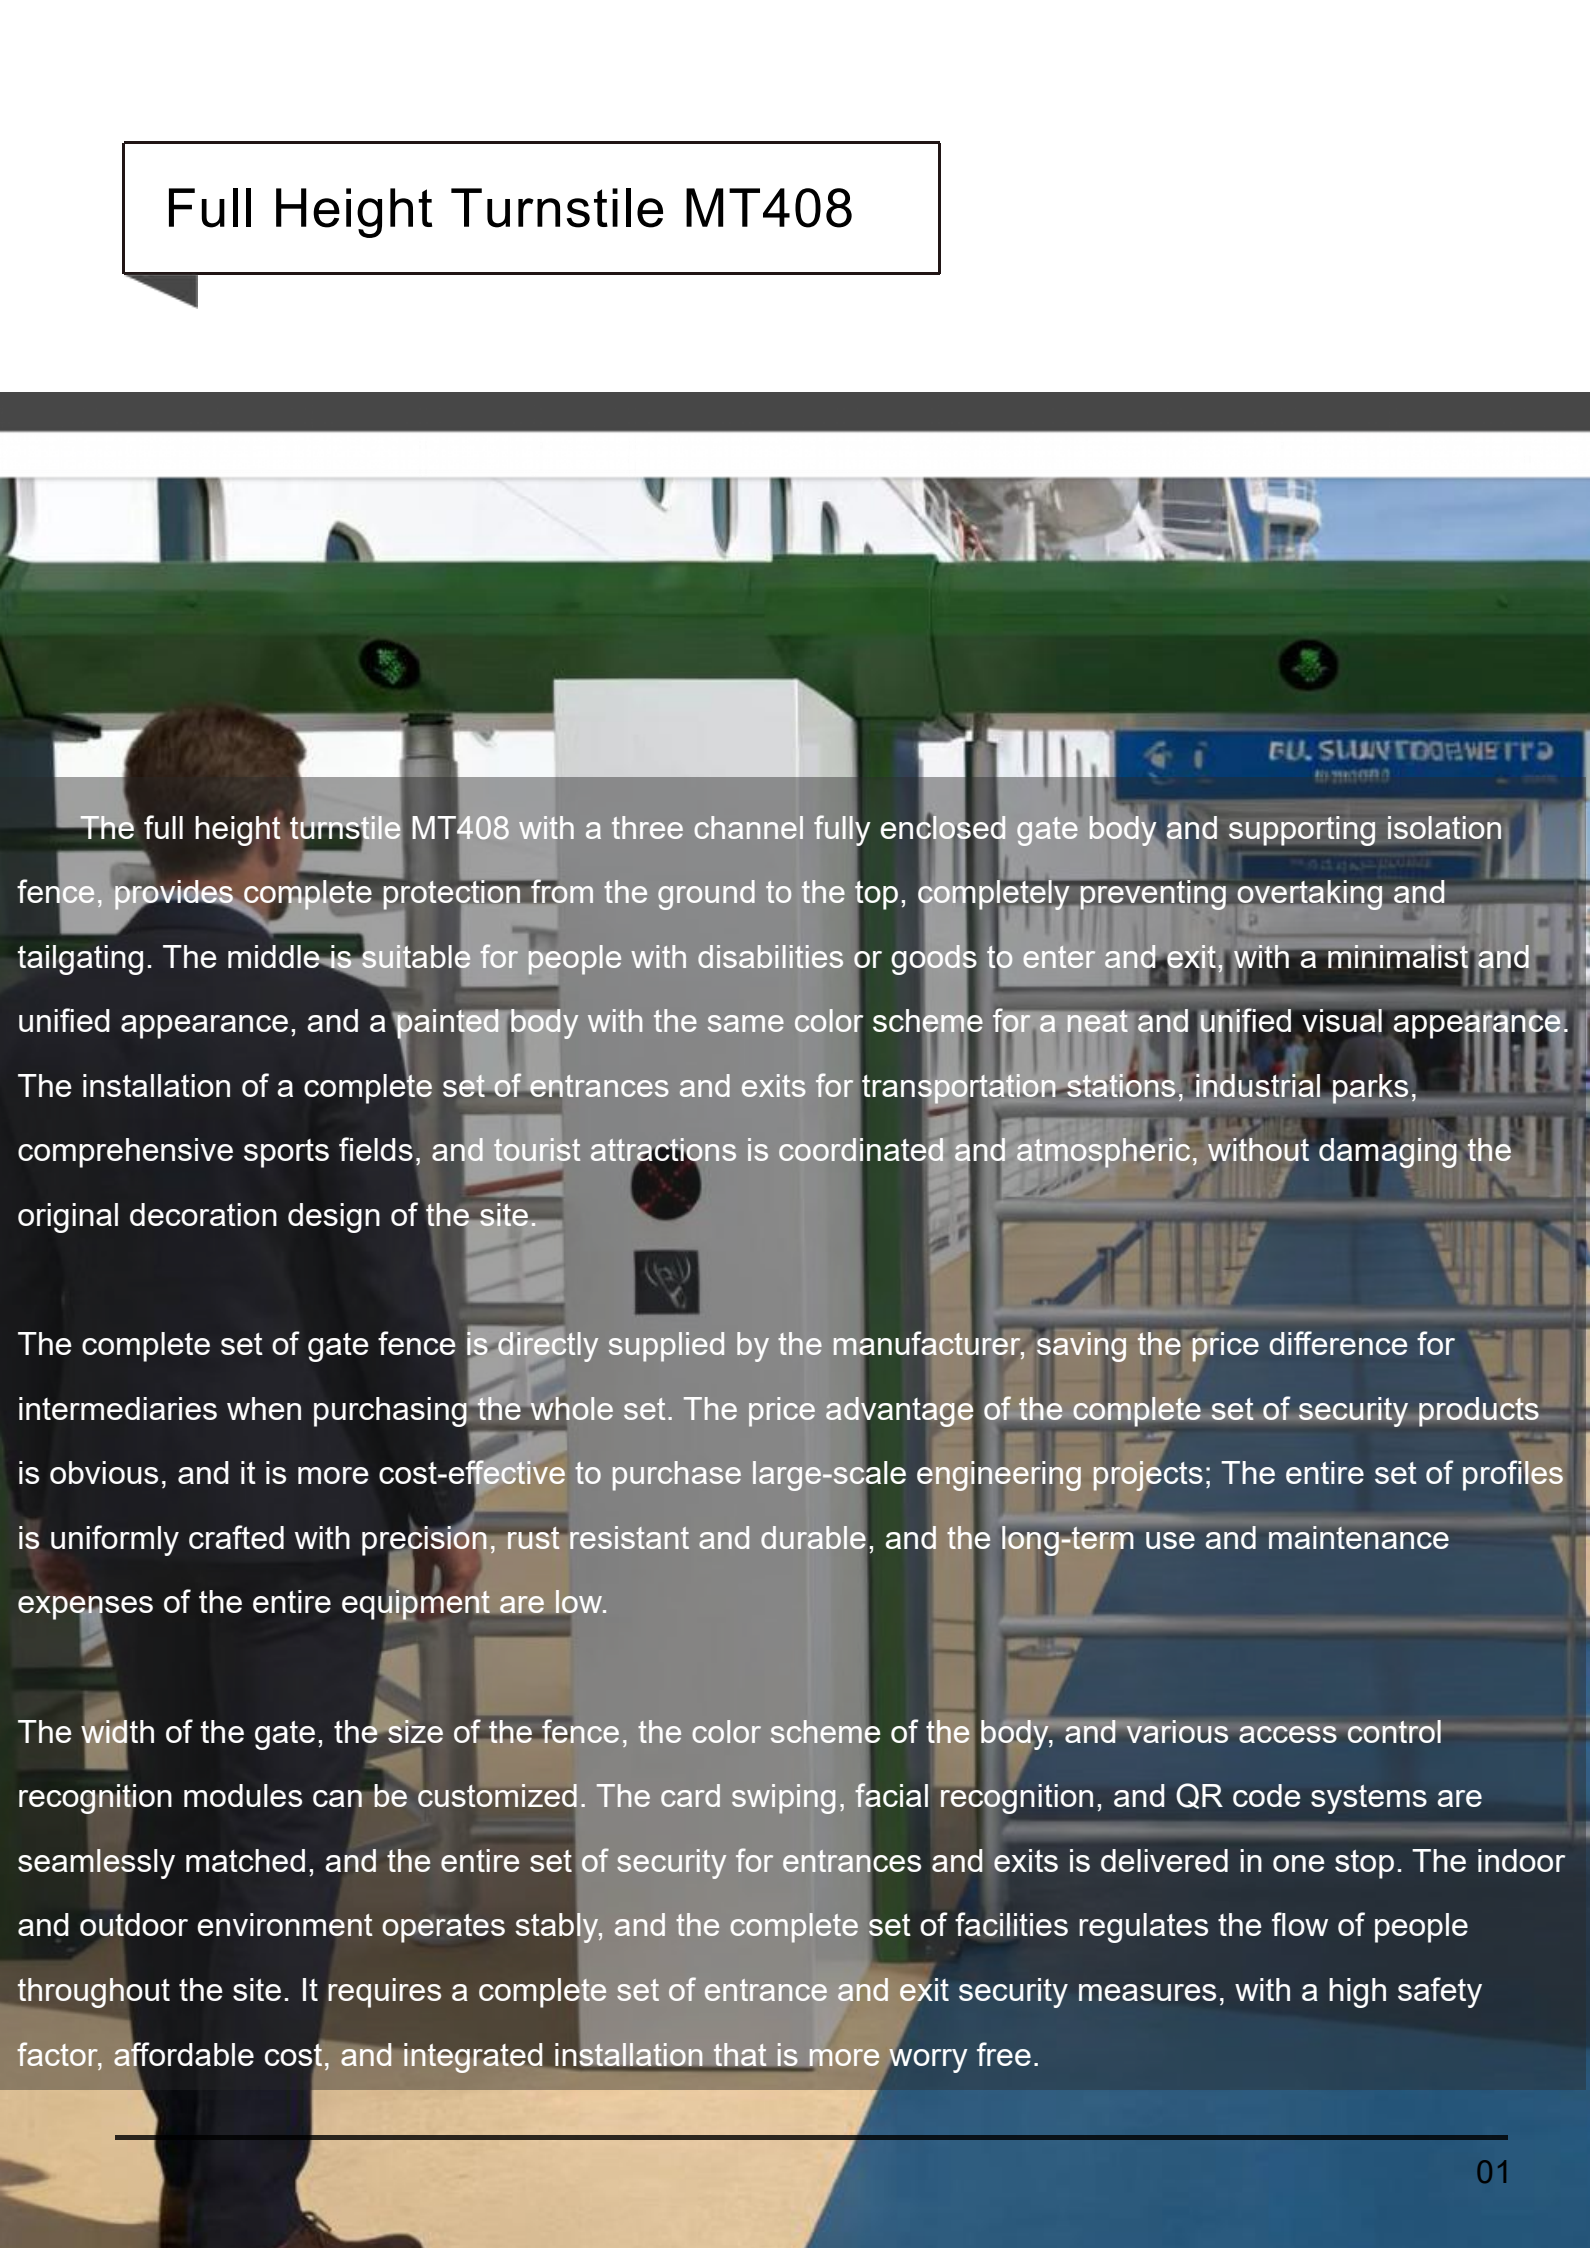

The full height turnstile MT408 with a three channel fully enclosed gate body and supporting isolation fence, provides complete protection from the ground to the top, completely preventing overtaking and tailgating. The middle is suitable for people with disabilities or goods to enter and exit, with a minimalist and unified appearance, and a painted body with the same color scheme for a neat and unified visual appearance. The installation of a complete set of entrances and exits for transportation stations, industrial parks, comprehensive sports fields, and tourist attractions is coordinated and atmospheric, without damaging the original decoration design of the site.




The complete set of gate fence is directly supplied by the manufacturer, saving the price difference for intermediaries when purchasing the whole set. The price advantage of the complete set of security products is obvious, and it is more cost-effective to purchase large-scale engineering projects; The entire set of profiles is uniformly crafted with precision, rust resistant and durable, and the long-term use and maintenance expenses of the entire equipment are low.

The width of the gate, the size of the fence, the color scheme of the body, and various access control recognition modules can be customized. The card swiping, facial recognition, and QR code systems are seamlessly matched, and the entire set of security for entrances and exits is delivered in one stop. The indoor and outdoor environment operates stably, and the complete set of facilities regulates the flow of people throughout the site. It requires a complete set of entrance and exit security measures, with a high safety factor, affordable cost, and integrated installation that is more worry free.

Technical Specifications

Dimension	4800*1450*2300mm (15.75*4.76*7.55ft) (standard)
Passage Width	650mm (2.13ft) (standard)
Passage Height	2000mm (63.56ft) (standard)
Frame Material	304 stainless steel (standard), 316 stainless steel, Powder coated
Power Supply	100V-240V 50/60Hz
Drive Solenoid	DC 24V
Open Signal	Passive Relay (Dry Contact)
Communication	RS485
Working Direction	Bi-directional(standard), Unidirectional
Fire/Emergency	Free to exit
Working Temperature	-30°C ~ 80°C
Working Environment	Indoor and Outdoor
Relative Humidity	95% Maximum

Dimensions

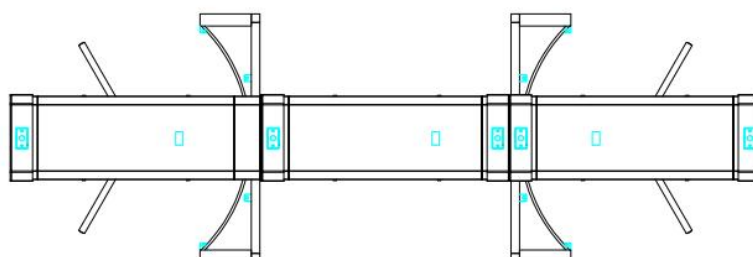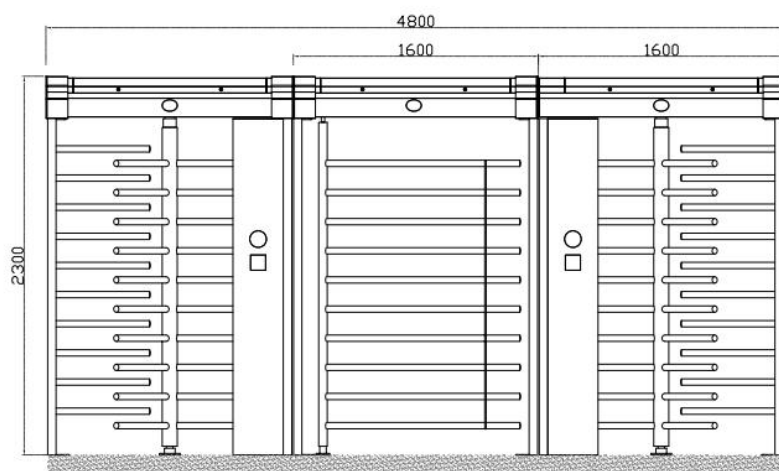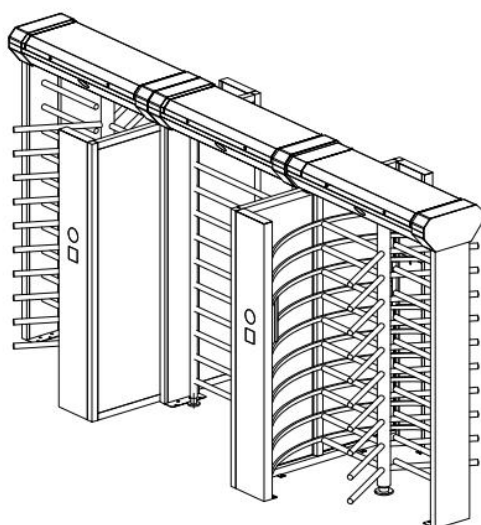

Features




- The mechanism comes with mechanical anti-passback function.
- Equipped with a hydraulic shock absorber for less noise during operation.
- X rotor mechanism: If rotor revolves to the angle 45° and it is blocked from reverse rotation.
- The full turnstile will lock after 5 seconds if there is open signal but no one pass. (The time can be adjusted in the control board)
- Automatic opening after emergency fire signal input.
- Normal open can be also controlled via control board or manual.
- Full turnstiles will automatically open when power failure.
- Controller with a display, more convenient to set parameters.


Customization

- Dimension: Can be made according to the client's site.
- Barrier rod: Straight barrier rod to U-shape barrier rod; X rotor to Y rotor (some models).
- Roof and lights can be added.
- Mounting base can be added.
- Cutouts can be customized to fit any reader.
- LOGO can be customized.
- Customized 3D drawings are available based on the site photos.
- OEM& ODM service is available.
- Material: 304 stainless steel to 316 stainless steel (wet environment), or iron with powder coated. The outer paint finish can be colour coded to match the local environment.

We also offer customization services.

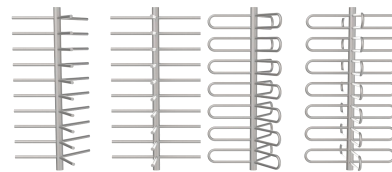

Various barrier rods are available.



Other colors available, RAL or RGB required.




With roof




With mounting base

Disassembly

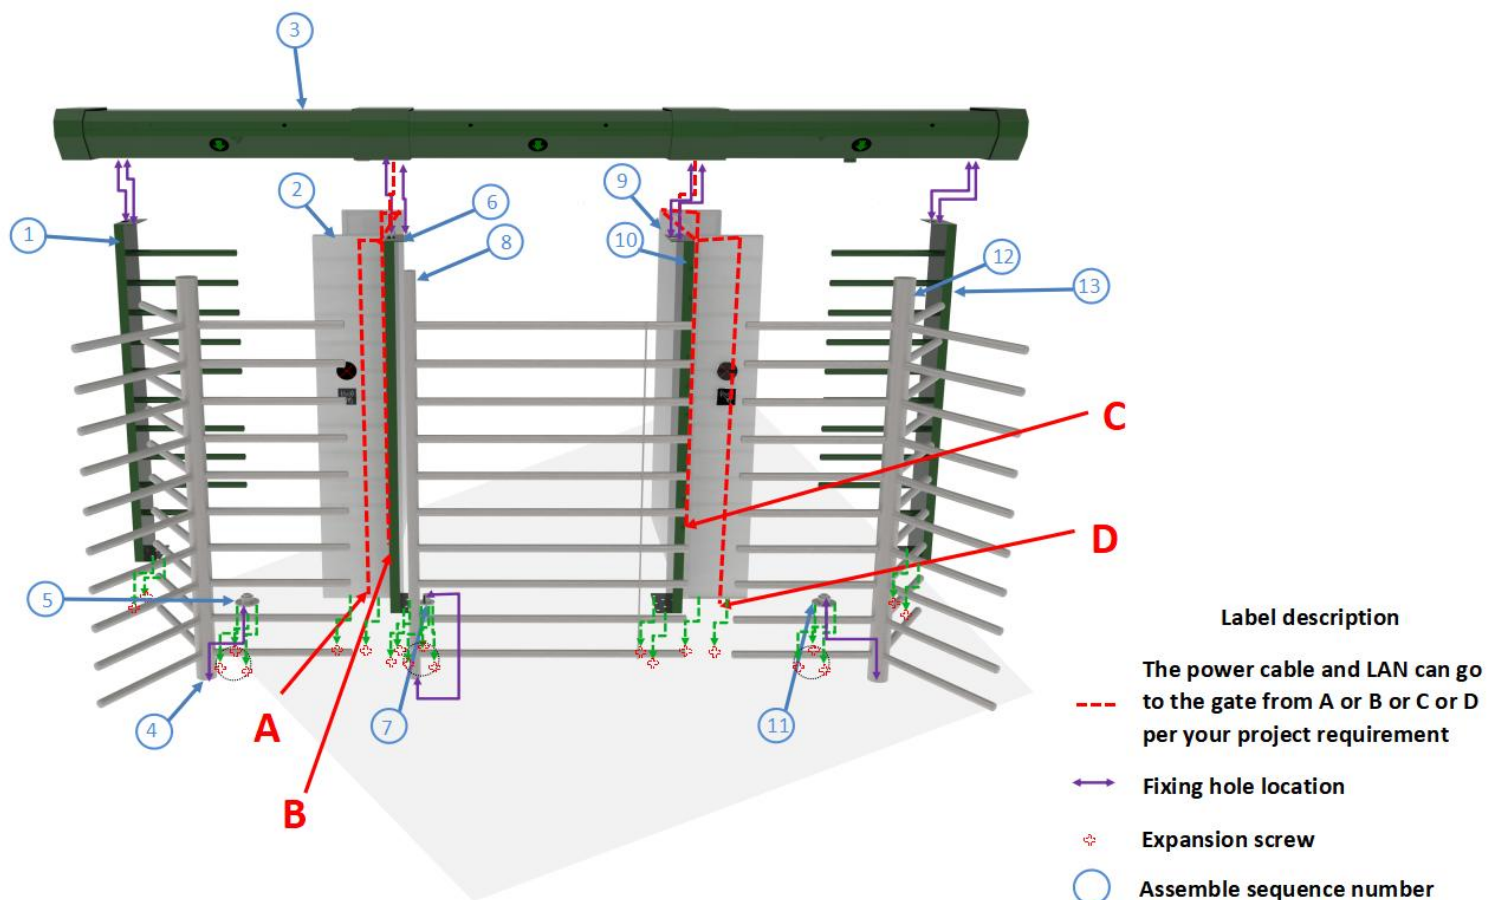


Access Control System


Our gates come with relay signals and RS485/RS232 interfaces. You can use your own access control system, or we can provide a complete access control system to you.

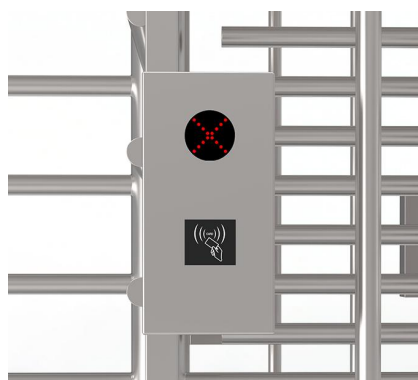

Card Reader

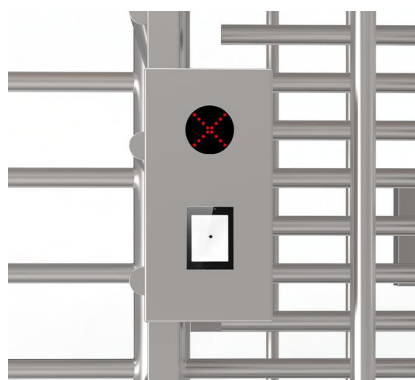

QR Code

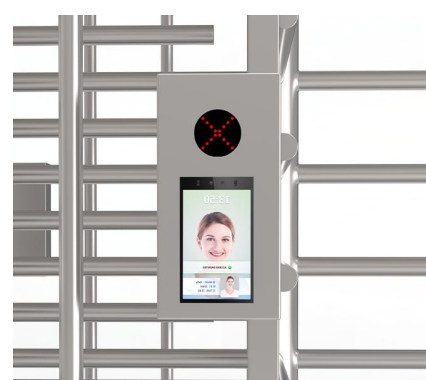

Biometric



Face



Remote Control



QR Code



Card Reader



Button



Fingerprint



Contact Us

Address: Room 801-806, South China Development Center,Guoji Blvd, Pinghu Street,Longgang District, Shenzhen, China

Email: info@mairsturnstile.com

Tel: +86 755 28714921

Site: www.mairsturnstile.com